

GENERAL-PURPOSE RELAY

Features

- 10 A Contact operating capacity
- Mechanical life=> 100000
- With 3Z contact forms
- Standard tube terminal
- With matched socket
- Including LED, test button

Contact Ratings

| | |
|--------------------|---------------|
| Contact Ratings | 3NANC |
| Contact Resistance | 50m (1A 6VDC) |
| Contact capacity | 10A/5A(NO/NC) |
| | 28VDC/220VAC |

Specification

| | |
|-----------------------|---------------------|
| Insulation Resistance | 500M , 500VDC |
| Dielectric Strength | BCC 1000Vr.m.s 1min |
| | BOC 1500Vr.m.s 1min |
| Operate Time | 30ms /20ms |
| Terminal Type | Socket |

Coil Ratings

| | |
|--------------------|------------|
| Nominal Coil Power | 1.5W/2.5VA |
|--------------------|------------|

Coil Versions

| Nominal Voltage VDC | Pull-in Voltage VDC | Release Voltage VDC | Coil Resistance : 10% | Nominal Voltage VAC | Pull-in Voltage VAC | Release Voltage VAC | Coil Resistance : 10% |
|---------------------|---------------------|---------------------|-----------------------|---------------------|---------------------|---------------------|-----------------------|
| 6 | 4.8 | 0.60 | 24 | 6 | 4.80 | 1.80 | 14.5 |
| 12 | 9.6 | 1.20 | 96 | 12 | 9.60 | 3.60 | 20 |
| 24 | 19.2 | 2.40 | 384 | 24 | 19.2 | 7.20 | 80 |
| 48 | 38.4 | 4.80 | 1540 | 48 | 38.4 | 14.4 | 320 |
| 100 | 80.0 | 10.0 | 9600 | 110/120 | 88.0 | 36.0 | 1700 |
| 110 | 88.0 | 11.0 | 9650 | 220/240 | 176.0 | 72.0 | 7400/8760 |




60.13

Socket type



90.23

Dimension.Bottom View

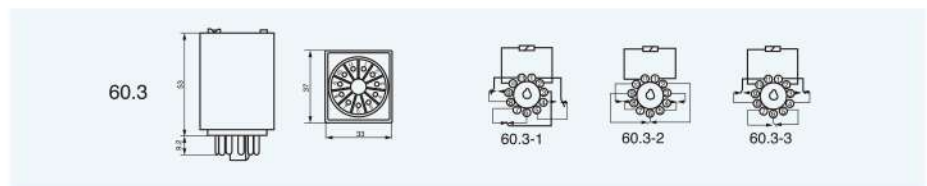

Reference Data

