

 Features:




1. Rated Voltage : DC1000V
2. Rated Current: 100A-1250A
3. Operation : Outdoor or Indoor
4. According to : CE
5. Material : DMC And PA66 V0
6. Contact Material : Red Copper T3
7. Phase : 2P or 4P

 Specification

Item	MGL-250	MGL-400	MGL-630	MGL-1250
Rated operating voltage	1000VDC	1000VDC	1000VDC	1000VDC
Rated insulation voltage	1500VDC	1500VDC	1500VDC	1500VDC
Use category	DC-21B	DC-21B	DC-21B	DC-21B
Rated impulse voltage	12.0kV	12.0kV	12.0kV	12.0kV
Rated operating current	100A;160A;250A	250A;315A;400A	500A;630A	800A;1000A;1250A
ICW	5kA/1s	12.6kA/1s	12.6kA/1s	30kA/1s
ICM	9kA	17kA	17kA	63kA

 Dimensions

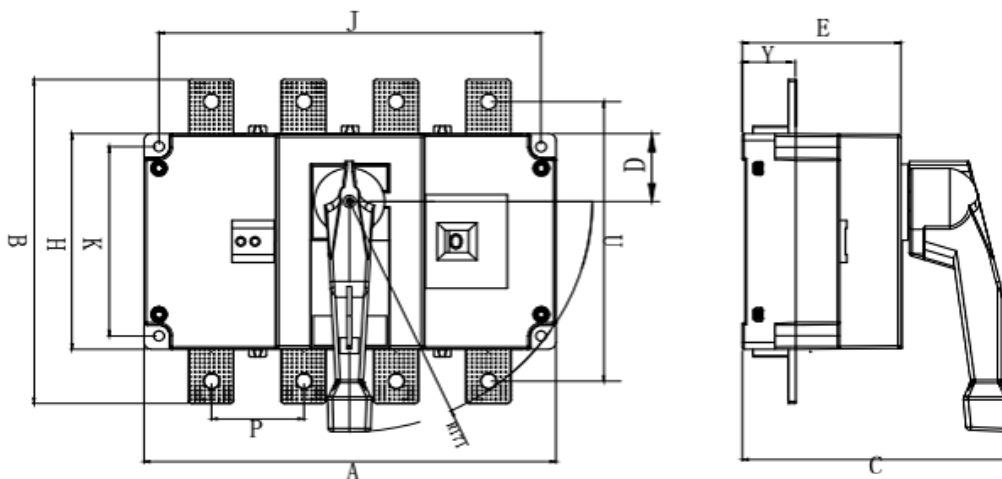

Model	Overall dimensions										Installation Dimensions	
	A	B	C	D	E	H	Y	U	P	ΦX	J	K
250A/4	232	170	151	32	89	110	26	141	50	10.5	212	90
400A/4	290	240	200	50	111	160	38	208	65	11	269	140.5
630A/4	290	240	200	50	111	160	38	208	65	11	269	140.5
1250A/4	493	338	218	73	144	200	48		120	13.5	471	140